

BS-9420

SPECIAL MALLET

- ① **Hex bumping head**
Hex shape is able to distribute force evenly
- ② **Ergonomic handle**
Sturdy and bent upward handle prevents hand to be hurt while bumping
- ③ **Special rubber filling**
The special material is permanently elastic, but becomes hard when being pounded

- Mallet with special rubber filler that is elastic in nature, but hard when in use
- For pushing in and fixing vehicle door weatherstrips, fender flares, and bumpers
- Avoid scratching and damaging bumpers, panels, and car body in general.

Application:



PC-9366

SUSPENSION ARM & LEVER HOOK TOOL SET




Designed to allow a simple lever or pry bar to be easily and quickly attached to lower suspension arms etc, allowing the user to lever the component in the required direction.

- Lower control arm prying tool.
- Length: 105mm.
- Provides a simple connection to provide a lever point for pry and lever bars when pulling down lower track control arms, suspension arms, roll bars and exhaust hangers, etc.
- Manufactured from SCM440 steel for strength, with a black finish and protective end caps.
- Suitable for use with pry and lever bars

PC-9367

JACK LIFT PAD FOR TESLA MODEL S 3 X Y (4PCS)

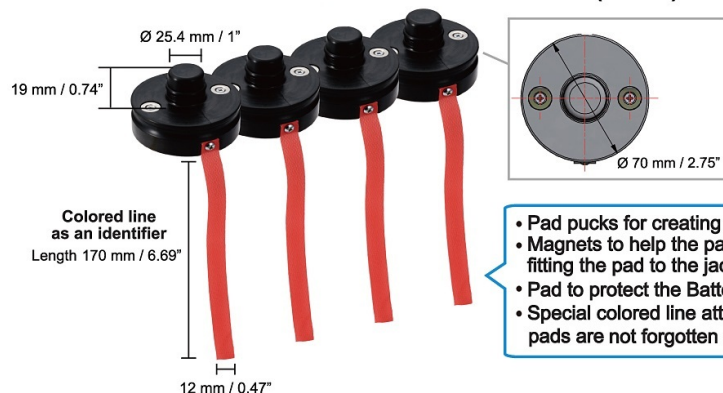

Application:

- 1 Locate the lift point holes in the Tesla subframe. Model S and Model X have three holes on each lift point. It is recommended to use the center hole. Model 3 and Model Y have only one hole.




- 2 When servicing the Battery, it is necessary to position the lift arm to the outer jack lift holes, which are bigger than the regular jack lift points. The magnets on the pad are able to stick to the metallic frame



- Pad pucks for creating a safe jack lifting point for Tesla mode
- Magnets to help the pad to stick to the metallic frame when fitting the pad to the jack point for servicing the Battery
- Pad to protect the Battery at the bottom of Tesla
- Special colored line attached as an identifier so the pads are not forgotten after servicing Tesla

- 3 Insert the jack pad into the lift point hole (Fig 3). Make sure the jack pads are securely fitted and it is safe to jack up the Tesla.
- 4 The colored line is for identification purposes to tell the mechanics not to forget that the pads are still connected underneath the car after services.



E-mail: service@kaupa.com.tw

KAUPA INTERNATIONAL CO.,LTD

GT-9620

COB HEAD LIGHT WITH SENSOR with 1pc USB charging cable



Color Temperature(CCT)	6500K	Input Voltage(V)	DC5V
Lamp Luminous Efficiency(lm/w)	100	Color Rendering Index(Ra)	80
Support Dimmer	YES	Lifespan (hours)	40000
Working Time (hours)	10000	Product Weight (kg)	0.155
Usage	Industrial	Power Source	Rechargeable Battery
Lighting Period (h)	3	Battery Type	Lithium Ion
IP Rating	IP54	Lamp Body Material	ABS+RUBBER
Base Type	AR111	Color	White
Light Source	LED	Lumen	250LM
Working time	3-5hours	Charging time	3-4hours
Function	50%-100%-OFF	Battery	3.7V 1600mAh Li-ion Battery
Material	ABS+RUBBER	Product weight	155g
Product size	10*5*4cm	Sensor function	motion detection

GT-9621

COB Work Light With Top Torch WITH USB CABLE + USB AC CHARGER (USA PLUG)

IP Rating	IP54,IK07	Color Temperature(CCT)	6500k
Beam Angle(°)	120	CRI (Ra>)	80
Input Voltage(V)	AC100-240V	Lamp Luminous Efficiency (lm/w)	80
Lamp Luminous Flux(lm)	600LM/250LM	Working Lifetime(Hour)	50000
Working Temperature(°C)	-20-50	Color Rendering Index(Ra)	80
Emitting Color	White	Power Supply	DC
Light Source	LED	Lifespan (hours)	20000
Working Time (hours)	40000	Lumen	600LM/250LM
Working time	1.8hours/4hours	Charging time	4hours
Function	Top Torch-Main light low mode-Main light high mode-OFF	Battery	3.7V 2600mah Li-ion Battery
Material	ABS housing +PC lens, Nylon hook	Product weight	361g
Product size	8.4*11.7*20cm		




E-mail: service@kaupa.com.tw

KAUPA INTERNATIONAL CO.,LTD

BR-9111

FOUR SIDE BRAKE CALIPER FILE TOOL

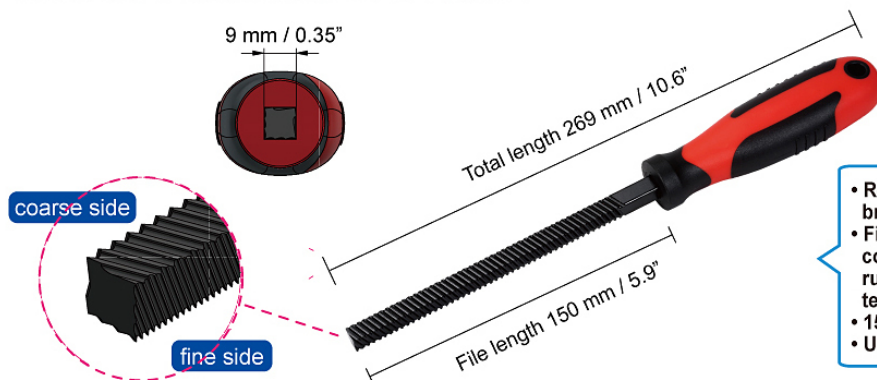

Material	CrV
Surface	Manganese phosphate
Hardness	HRC 62-66

- Removes dust, corrosion, rust, and dirt from the brake caliper housing.
- File is four sided. Two adjacent sides are with coarse teeth for removing bigger and chunky rust. Another two adjacent sides are with fine teeth for more detailed cleaning or final polishing.
- 150mm/5.9" file length, and 9mm/0.35" file width.
- Universal application.

Application:



GT-9623

12W USB-C Rechargeable Li-ion Powered Soldering Tool



- 12W USB-C Rechargeable Li-ion Powered Soldering Tool
- 1500mAh, output voltage 4.2volt
- Charging time: 2 hours
- 10secs to reach the working temperature and melt solder
- Max. temperature 560°C
- With a cap (this cap is also a stand) and a heat shrink tip as well

TS-9155

23PCS COOLING SYSTEM LEAKAGE TESTER AND VACUUM-TYPE COOLANT REFILLING KIT



- Pressure pump to test leaks in cooling system.
- Provided with 3 twist-on type and 16 threaded type adapters, covering almost all types of car makes and models on the market
- Vacuum-type coolant refill tool has large internal passages to allow coolant to be refilled fast.
- Radiator cap test tubes (black and blue) to test if the radiator cap from the car has leaks.
- Coolant hose and drain hose are made of cold-resistant material.

Application:

