

KAUPA MONTHLY (AUGUST/2016) BROCHURE- PRODUCT INDEX

PAGE1:

ARW-9860 5" QUIET AND HIGH EFFICIENT SANDER-12,000RPM

ARW-9861 1/2" TWIN HAMMER 106MM-8,800RPM

PAGE2:

BR-9063 BRAKE DISC MEASURING TOOL SET < HOT PRODUCT >

ET-9237 IMPACT EXTRACTOR FOR PRE-CHAMBER FOR MERCEDES ENGINES

ET-9238 CYLINDER HEAD BORE JIG SET < HOT PRODUCT >

ET-9235 SPECIAL WRENCH SET

ET-9236 PULLER FOR CLUTCH RELEASE SHAFT

PAGE3:

BS-9245 DOUBLE SUCTION CUPS

BS-9246 DOUBLE SUCTION CUPS

BS-9248 DOUBLE SUCTION CUPS WITH ADJUSTABLE HEADS-148MM/40KGS

BS-9259 MULTI-FUNCTION SUCTION CUPS WITH ALARM WARNING
SYSTEM-200M/100KG

BS-9264 SEAMING TOOL

BS-9265 SINGLE SUCTION CUP

PAGE4:

OF-9049 19PCS OIL FILTER CAP WRENCH SET FOR CATRIDGE TYPE FILTER

OF-9050 EZ OIL FILTER WRENCH 30-150MM < HOT PRODUCT >

OF-9051 1/2"Dr. 24MM OIL FILTER WRENCH 140L

OF-9051-A 1/2"Dr. 24MM OIL FILTER WRENCH 101L

OF-9051-2P 2PCS 1/2"Dr. 24MM OIL FILTER WRENCH 140L & 101L SET < HOT PRODUCT >

PAGE5:

PC-9277 TIMING PULLEY PULLER < HOT PRODUCT >

TT-9239 SPECIAL TIMING WRENCH

TT-9240 BMW PULLEY WRENCH

PC-9279 BEARING BUSHING PUSHER & PULLER

PC-9280 GEAR JAW SEAL PULLER WAIST SIZE -FORNT JAW 3MM/REAL JAW 3MM

PC-9280-1 GEAR JAW SEAL PULLER WAIST SIZE -FORNT JAW 5MM/REAL JAW 5MM

PC-9281 GEAR JAW SEAL PULLER STANDARD SIZE -FORNT JAW 3MM/REAL JAW 3MM

PC-9281-1 GEAR JAW SEAL PULLER STANDARD SIZE -FORNT JAW 5MM/REAL JAW
5MM

PAGE6:

ST-9189 HONDA/ACURA REAR TRAILING ARM SOCKET (10 POINT)

ST-9190 FLYWHEEL BOLT SOCKET

ST-9286 3/4" DR. 8PCS DRIVE SHAFT SOCKET SET < HOT PRODUCT >

H14-17-19 x60L

27-30-32-34-36MMx90L

ST-9287 3/4" IMPACT SOCKET SET-22-24-26-27-30-32-36-38MM < HOT PRODUCT >

ST-9288 3/4" DEEP IMPACT SOCKET SET-22-24-26-27-30-32-36-38MM < HOT PRODUCT >

PAGE7: < HOT PRODUCT >

TT-9208 BENZ TIMING TOOL SET(M276)

TT-9210 BENZ TIMING TOOL SET (M270)

TT-9212 VW GOLF TIMING TOOL KIT

TT-9212-1 VW GOLF TIMING TOOL KIT

TT-9218 BMW TIMING TOOL KIT - S65

TT-9228 ENGINE TIMING TOOL KIT - FORD 1.0 ECOBOOST 3 CYLINDER PETROL
ENGINE



www.kaupa.com.tw

ARW-9860

5" QUIET AND HIGH EFFICIENT SANDER-12,000RPM




Three Features (in the same Level)

- The Lower Noise
- The Lighter Weight
- The Higher Efficiency

Specification:

- Pad Size: 5"
- Orbit Eccentricity:5mm
- Free Speed: 12,000RPM
- Weight: 2LBS
- Sound Level: 73.8dB

ARW-9860			Traditional Sander
73.8dB	Less 20%	Noise	89dB

ARW-9861

1/2" TWIN HAMMER 106MM-8,800RPM



Model	Square Drive	Impact Mechanism	Bolt Capacity		Free Speed	Working Torque		Max Torque		Avg.Air Consumption		Length		Weight		Air Inlet	Min Hose Size		Air Pressure	
	inch		inch	mm		rpm	ft-lb	Nm	ft-lb	Nm	cfm	L/min	inch	mm	lb		kg	inch	mm	psi
ARW-9861	1/2"	Twin Hammer	5/8	16	8800	90	122	500	678	4.0	113	4.17	106	3.17	1.44	1/4"	3/8	10	90	6.3
						430	583													

KAUPA INTERNATIONAL CO.,LTD

E-mail: service@kaupa.com.tw





www.kaupa.com.tw

BR-9063

BRAKE DISC MEASURING TOOL SET



- Gauge stand with 3-point connection for the assembly of the bumper
- Ideal for identifying of vertical and lateral wobble on the brake disk
- Transverse arm with joint and fine adjustment
- Includes dial gauge and micrometre for identifying wear limit
- Universal usage
- Simple handling

ET-9237

IMPACT EXTRACTOR FOR PRE-COMBUSTION CHAMBER FOR MERCEDES ENGINES



- Ideal for removing trapped diesel pre-combustion chambers
- Suitable for Mercedes engines OM615, OM616, OM617, OM601, OM602, OM603, OM604, OM605 and OM606

ET-9238

CYLINDER HEAD BORE JIG SET



- This universal adjustable drilling guide set allows broken or sheared studs -especially on cylinder-heads or exhaust manifolds- to be quickly and accurately extracted, without the need to remove the cylinder-head. (Male Thread M8 and M10)
- Time savings of between 2 and 4 hours can be achieved as the cylinder head has not to be removed from the vehicle.
- Universal usage.
- Straight boring out of old screw.

ET-9235

SPECIAL WRENCH SET



- Designed to loosen and tighten hard-to-reach screws on fan clutch, pulley, tensioner etc. 8 mm Suitable the Mercedes engines M102, M103, OM601, OM602, OM603, OM605 and OM606. For loosening and tightening the fan clutch and pulley at the water pump.
- T45 Suitable the Renault 2.2 Diesel engines (G8T), e.g. Espace, Laguna, Safrane etc. When removing and installing a V-belt, the automatic tensioner pulley needs to be tensioned by means of the special wrench so as to release the tension on the V-belt.
- T60 Suitable the BMW 5-Series (E60) 2.0 (M54) petrol engines and Mercedes C-Class (W203) 1.8 (OM271) petrol engines etc. When removing and installing a V-ribbed belt, the automatic tensioner pulley needs to be tensioned by means of the special wrench so as to release the tension on the V-ribbed belt.
- T50 Suitable the Renault 1.4 and 1.6 TwinCam petrol engines as found in: Clio III, Megane / Scenic II, Laguna II, Modus and Kangoo. For removing and installing the idler pulley, for example, when replacing a timing belt or performing an engine repair.
- T60x40 Suitable the VW-Audi 2.7 and 3.0 V6 TDI Diesel engines, e.g. Audi A4, A5, A6, A8, Q5 and Q7; VW Phaeton and Touareg. For removing and installing the idler pulley, for example, when replacing a timing belt or performing an engine repair.

ET-9236

PULLER FOR CLUTCH RELEASE SHAFT



Clutch shaft extraction



- Intended for the removal of the clutch release shaft.
- This tool is needed when removing the gearbox, for example when replacing clutches or for gearbox repairs.
- For pulling type clutches fitted to: Mercedes, BMW, Fiat Ducato (1994 on)

KAUPA INTERNATIONAL CO.,LTD

E-mail: service@kaupa.com.tw





www.kaupa.com.tw

BS-9245

DOUBLE SUCTION CUPS-
Diameter :117mm /4.8"



BS-9246

DOUBLE SUCTION CUPS-
Diameter :117mm /4.8"



BS-9248

DOUBLE SUCTION CUPS WITH
ADJUSTABLE HEADS-
148MM/40KGS



Detail (BS-9245,9246):

- Set of rubber suction pad for auto glasses.
- Can also be used to adjust and keep the position of windscreen.
- Used to keep the side glass in its position, allowing to work with free hands, for use let the cable carrying on the car door and fix the set of rubber suction pad on both side.

BS-9259

MULTI-FUNCTION SUCTION
CUPS WITH ALARM WARNING
SYSTEM-200M/100KG



BS-9264

SEAMING TOOL-
Diameter :117mm /4.6"



BS-9265

SINGLE SUCTION CUP :
117mm /4.6"



KAUPA INTERNATIONAL CO.,LTD

E-mail: service@kaupa.com.tw





www.kaupa.com.tw

OF-9049

19PCS OIL FILTER CAP WRENCH SET FOR CATRIDGE TYPE FILTER



SIZE	POINT	SUITABLE FOR MOTORCAR
SW 87mm	P-16	VOLVO
SW 63-64mm	P-14	TOYOTA
SW 74mm	P-14	MERCEDES-BENZ
SW 64.5mm	P-14	LEXUS
SW 64.5mm	P-14	TOYOTA
SW 84mm	P-14	2007 DODGER SPRINTER 2007 MERCEDES-BENZ E320 2007 JEEP CHEROKEE WITH 3.0L V6 COMMON RAIL DIESEL ENGINES
SW 67mm	P-14	FORD, MAZDA
SW 79mm	P-15	TOYOTA, HONDA, MITSUBISHI SUBARU, MAZDA, ISUZU
SW 92mm	P-15	NISSAN, SUBARU
SW 94.5mm	P-15	NISSAN, TOYOTA
SW 100.5mm	P-15	MAZDA, MITSUBISHI

SIZE	SUITABLE FOR MOTORCAR
24mm	BMW 2004 and newer 5.7 series and X5 with V8 motor (N62) Saturn 2008 Astra with 1.8L eco-tec Chrysler 2011 after with 3.6L V6 engine, 200, 300 and T/C Dodge Jeep
27mm	Mercedes A class
30mm	Audi A2 VW Polo, Lupo with 1.4L or 1.6L engine
32.5mm	Opel Astra G, Corsa B, Zafira, Audi, VW
36mm	Opel Omega, Vectra B, Zafira (98 on) BMW M43/60 Mercedes Vito CDI, C and E class VW Lupo 1.2 TDI Man
38mm	Opel Vectra 2.0D



OF-9050

EZ OIL FILTER WRENCH 30-150MM

OF-9051

1/2"Dr. 24MM OIL FILTER WRENCH 140L



OF-9051-A

1/2"Dr. 24MM OIL FILTER WRENCH 101L



OF-9051-2P

2PCS 1/2"Dr. 24MM OIL FILTER WRENCH 140L & 101L SET



KAUPA INTERNATIONAL CO.,LTD

E-mail: service@kaupa.com.tw





www.kaupa.com.tw

PC-9277

TIMING PULLEY PULLER



TT-9239


SPECIAL TIMING WRENCH



- Material: S45C STEEL Chrome plated
- Design for: Touareg 2003 >, Transporter 2004 >, 5-cyl. diesel engine
- For setting engine to cylinder 1 TDC

TT-9240

BMW PULLEY WRENCH

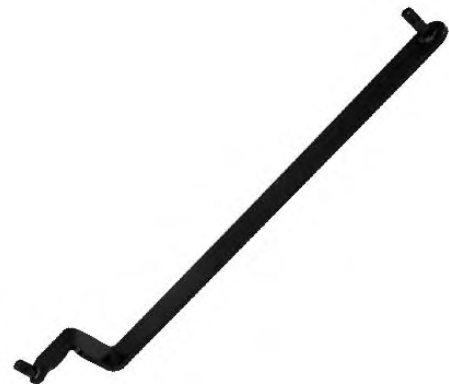

PC-9279

BEARING BUSHING
PUSHER & PULLER



PC-9280 / PC-9280-1

- 9280** GEAR JAW SEAL PULLER WAIST SIZE FORNT JAW 3MM/REAL JAW 3MM
- 9280-1** GEAR JAW SEAL PULLER WAIST SIZE FORNT JAW 5MM/REAL JAW 5MM



PC-9281 / PC-9281-1

- 9281** GEAR JAW SEAL PULLER STANDARD SIZE FORNT JAW 3MM/REAL JAW 3MM
- 9281-1** GEAR JAW SEAL PULLER STANDARD SIZE FORNT JAW 5MM/REAL JAW 5MM



KAUPA INTERNATIONAL CO.,LTD

E-mail: service@kaupa.com.tw





www.kaupa.com.tw

ST-9189

HONDA/ACURA REAR TRAILING
ARM SOCKET (10 POINT)



- Special 10-Point socket
- Services Honda Civic, CR-V and Acura RSX
- Use with a 3/8-inch Square Drive
- Heavy-Duty Construction Allows for Strength and Durability

ST-9190

FLYWHEEL BOLT SOCKET



- 10PT x 12mm socket services clutch pressure plate bolts on Mitsubishi 3000 & Dodge Stratus
- clutch assemblies
- 3/8" Square Drive
- Material: CR-MO

ST-9286

3/4" DR. 8PCS DRIVE SHAFT
SOCKET SET
H14-17-19 x60L
27-30-32-34-36MMx90L



ST-9287

3/4" IMPACT SOCKET SET
22-24-26-27-30-32-36-38MM



ST-9288

3/4" DEEP IMPACT SOCKET SET
22-24-26-27-30-32-36-38MM



KAUPA INTERNATIONAL CO.,LTD

E-mail: service@kaupa.com.tw





www.kaupa.com.tw

TT-9208

BENZ TIMING TOOL SET
(M276)



TT-9210

BENZ TIMING TOOL SET
(M270)



TT-9212

VW GOLF TIMING TOOL KIT



TT-9212-1

VW GOLF TIMING TOOL KIT



TT-9218

BMW TIMING TOOL KIT - S65



TT-9228

ENGINE TIMING TOOL KIT -
FORD 1.0 ECOBOOST 3 CYLINDER
PETROL ENGINE



KAUPA INTERNATIONAL CO.,LTD

E-mail: service@kaupa.com.tw

