


RECHARGEABLE UVC DISINFECTION LAMP

GT-9512

www.kaupa.com.tw



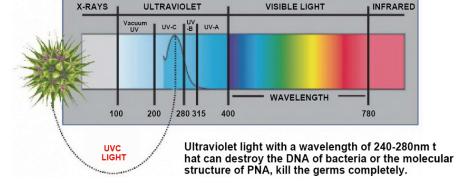

- Widely used in the disinfection of the surfact of objects without any damage.
- · Easy & simple to operate and carry on.
- Easily kills airborne viruses while posing no risk to people
- 20 seconds the light will be automatically turned off to avoid long-term UVC exposure
- ·Kill 99.9% Germs in 20 seconds<3cm
- Wavelenght: 270~285mm Lamp Bead Angle: 120"
- · Radiation Power: 8~15mW
- 18650 Li-ion 3.6V Rechargeable Battery
- Storage temperature: 30°C to 60°C
- Operation temperature: -40°C to 80°C
- Action Time: UP to 3 Hours+
- · Charger Time: 2 Hours (DC 5V2A)
- LED Charging Indicator: Red Light On-in charging
 Green Light On completely charged
- Product Size: 215(L)x27(W)x30(H)mm
 Weight: 130G

CAUTION: DO NOT DIRECT LIGHT ON EYE/SKIN

Widely Application:

Keyboard, Mouse, Door Knobs, Handlebar Grip, Cell Phone, Pet Area,...ETC.





















SAFETY FACESHIELD


GT-9514


www.kaupa.com.tw



Face shield material is PET (Thickness: 0.188mm)

 Size dimension: 235mmx190mm, to provide large coverage over the face





- It has Anti-fog on interior surface to prevent fogging and provide comfort vision
- Hook design on frame tip is designed to hold rubber band/elastic band for secure fit during activities
- Face shield is design to fit-over Prescription glasses
- ·100% recyclable
- 30% lighter than traditional face shield
- MADE IN TAIWAN











ST-9441

SUSPENSION STRUT SOCKET SET 24PCS

- Permits the removal of the top suspension nut by holding the strut piston, so it doesn't rotate while turning the nut.
- The go-through design of the socket and ratchet allows the extension to pass through the middle.
- To be used in conjunction with a 1/2"Sq Drive ratchet or T-bar (not included).
- Drive: 3/8"DR
- Content: Go-Through Sockets Standard & Deep; 16, 17, 18, 19, 21, 22mm, 8mm Hex Bits; Hex - 5, 6, 7, 8mm, Spline - M10, TRX-Star* - T50, Shock Absorber Strut Sockets (x4), 3/8"Sq Drive Extension Bars; 90, 190mm



ET-9353

DIESEL INJECTOR SEAL EXTRACTOR TOOL

- 2pcs Conical remover with three thread entry.
- Used to assist the extraction of the copper washers used to seal diesel injectors where they enter the cylinder head.
- The tapered and end of the threaded tool are screwed into the copper seal to grip, and then steadily tapped up with the built-in slide hammer.
- Applicable diameter: 4.5mm (min) to 13.2mm (max).



ET-9352

CLUTCH-CENTRING **SLEEVE**



- · Removal of a diesel injector seal that is completely clogged and stuck in the housing.
- Conical remover with double thread entry.
- Two removers: One for light vehicles (LV) and the other for light utility vehicles (LUV).
- No risk of parts dropping into the cylinder.

ITEM NO.	Description & Application
ET-9352-1	Clutch-centring sleeve, Ø24 mm for BMW E46
ET-9352-2	Clutch-centring sleeve Ø26.5 mm, for BMW and Audi
ET-9352-3	Clutch-centring sleeve, Ø32.5 mm, for BMW models equipped with pretensioned SAC clutch pressure plate.
ET-9352-4	Clutch-centring sleeve, Ø32.5mm, for BMW vehicles equipped with GS6-53DG gearboxes and S65(V8) or S85 (V10) engines as on E92 (M3), E60 (M5)
ET-9352-5	Clutch-centring sleeve Ø26.5 mm, for BMW (E36, E39, E46, E87)
ET-9352-6	Clutch-centring sleeve Ø28 mm, for BMW
ET-9352-7	Lutch-centring sleeve, Ø32.5 mm for BMW E90-92 M3 (SAC)







KAUPA INTERNATIONAL CO.,LTD



TT-9266

FORD 2.0 ECO BLUE DIESEL TIMING TOOL

- . This timing kit has been designed for the latest Ford 2.0D EcoBlue TDCi engine which features an innovative "belt in oil" design where the synchronous drive belt is sited inside the oiled area of the engine
- Applications: Ford Transit, Transit Custom and Tourneo Custom with Ecoblue TDCi engines: AWD, FWD, RWD 2016 onwards
- Equivalent to OEM tools 303-1637, 303-1650, 303-1643



ET-9351

VALVE SPRING COMPRESSOR

- Features and Benefits: Use to seal steel lines once disconnected.
- · Prevents fluid leaks and contamination during
- Use with all automotive fluids. Suitable for Fuel Rails and Lines, Flare Type Steel Brake, Fuel and A/C Lines, Banjo fittings on Brake, Power Steering and Transmission Cooler Lines. Installs in seconds.

ET-9350

LONG-REACH **HARMONIC** BALANCER/ **PULLEY INSTALLER**



- Traditional harmonic balancer installers cannot be used to install the harmonic balancers on V8s and V6s for late
- model GM, Ford, Chrysler, Dodge vehicles
- Reduce the risk of stripping threads inside the crank
- · Reduce the rick of breaking cranking bolts

Size	Application
Center screw M16 × 2.0	For GM vehicles (2008-2012 4.8L, 5.3L, 5.7L, 6.0L, 7.0L Models)
Center screw M12 × 1.5	For Ford vehicles (2004-2012 3.0L, 3.5L, 4.6L, 5.4L, 6.8L Models)
Center screw M14 × 1.5	For Chrysler/Dodge vehicles with V8s (2006-2012 3.7L, 4.7L, 5.7L, 6.1L Models)
Center screw M12 × 1.75	For Chrysler/Dodge vehicles with V6s (2006-2012 3.7L, 4.7L, 5.7L, 6.1L Models)









www.kaupa.com.tw



SPANNER EXTENSION WRENCH-POLISH FINISH



- Extends the length of spanners when you need more power
- Length 385mm
- Universal use

PS: Gloves and goggles should be used in high powered situations

ET-9354

UNIVERSAL INJECTOR **DENSO TOOL**

- Suitable for DENSO injectors.
- Accurately fitting adapter forks mounted on the injector and the thread of the injection line are used for extraction.
- No removal of the injector's electronic unit required.
 Slide hammer used for extraction.





Application:













