



www.kaupa.com.tw

ARW-9881

1/2" HEAVY DUTY AIR RATCHET
WRENCH 266MML-200RPM



Drive Type	Square Drive	Bolt Capacity	Max Torque	Free Speed	Avg. Air Consumption	Length	Weight	Air Inlet	Min Hose Size	Air Pressure	Sound Pressure Level	Sound Power Level	Vibration Level	Package
Standard	1/2"	in(mm)	ft-lb(Nm)	RPM	cfm(l/min)	in(mm)	lb(kg)	NPT & PT	in(mm)	psi(bar)	dB(A)	dB(A)	m/s ² (K)	pcs/carton
		1/2(13)	65(88)	200	3.6(102)	10.47 (266)	2.60 (1.18)	1.4"	3/8(10)	90(6.3)	96.2	107.2	4.4(0.93)	20

ARW-9882

MINI 1/2" TWIN HAMMER
IMPACT WRENCH-
12,000RPM




- Blade with spring mounted to prevent dead-lock or power-less problem.
- 6 position Power regulator: 3 settings in forward, 3 in reverse.
- Tease Trigger, Handle Exhaust

Std. Bolt Cap.	Square Drive	Working Torque Range @2sec	Max Torque @5sec.	Free Speed	Length	Weight	Noise
in(mm)	inch	ft-lb(Nm)	ft-lb(Nm)	RPM	mm	kg	dB(A)
9/16"(14)	1/2"	20-300 (34-406)	400(542)	12000	140	1.6	95.4

ARW-9884

3/4" IMPACT WRENCH-7,500RPM

- Blade with spring mounted to prevent dead-lock or power-less problem.
- 6 position Power regulator: 3 settings in forward, 3 in reverse.
- Handle Exhaust

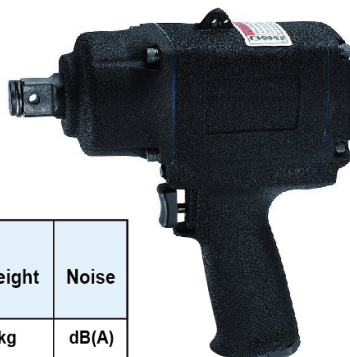

Std. Bolt Cap.	Square Drive	Working Torque Range @2sec	Max Torque @5sec.	Free Speed	Length	Weight	Noise
in(mm)	inch	ft-lb(Nm)	ft-lb(Nm)	RPM	mm	kg	dB(A)
13/16" (20)	3/4"	50-800 (68-1085)	1100 (1490)	7500	178	2.68	101.8

ARW-9885

3/4" IMPACT WRENCH-7,500RPM

- Blade with spring mounted to prevent dead-lock or power-less problem.
- 6 position Power regulator: 3 settings in forward, 3 in reverse.
- Tease Trigger, Handle Exhaust



Std. Bolt Cap.	Square Drive	Working Torque Range @2sec	Max Torque @5sec.	Free Speed	Length	Weight	Noise
in(mm)	inch	ft-lb(Nm)	ft-lb(Nm)	RPM	mm	kg	dB(A)
1-1/8" (30)	3/4"	100-1000 (135-1500)	1400 (1898)	7500	210	4.13	95.3



E-mail: service@kaupa.com.tw

KAUPA INTERNATIONAL CO.,LTD



www.kaupa.com.tw

ARW-9886

1/4" AIR RATCHET WRENCH-35NM (MAX)

- Full cage gear design
- Long service life



Square Size	Std. Bolt Cap.	Free Speed	Torque	Air Cons	Length	Weight	Min. Hose Size	Noise
in(mm)	mm	RPM	Nm	cfm(l/min)	mm	kg	inch(mm)	dB(A)
1/4"	6	260	35	5.34(150)	130	0.45	1/4"(6.35)	99

ARW-9891

6MM AIR DIE GRINDER (Burr Head 1/2"/ Grd. Wheel-1")- 24,000RPM



Throttle Type	Collet Capacity	Grinding Wheel	Burr Head	Free Speed	Length	Weight	Air Cons	Noise
Lever	inch or mm	inch(mm)	inch(mm)	RPM	mm	kg	cfm(l/min)	dB(A)
	1/4" or 6	1"(25)	1/2"(13)	24000	206	0.6	7.7(220)	80

- Full cage gear design
- Long service life

ARW-9889

3/8" REVERSIBLE AIR DRILL- 3,000RPM



Reversible	Chuck Size	Free Speed	Air Cons	Length	Weight	Noise
YES	in(mm)	RPM	cfm(l/min)	mm	kg	dB(A)
	1/8"(9.5)	3000	10(285)	185	1.24	93

ARW-9890

3" ANGLE POLISHER WITH 3" PAD- 3,000RPM



- With Regulator, easy to adjust speed,
- Rear exhause

Pad Dia.	Free Speed	Length	Height	Weight	Air Cons	Noise
inch	RPM	mm	mm	kg	cfm(l/min)	dB(A)
2"or3"	3000	187	121.5	0.8	7(200)	90/8



E-mail: service@kaupa.com.tw

KAUPA INTERNATIONAL CO.,LTD



www.kaupa.com.tw

GT-9521

1/4"DR 72 TEETH 1~25NM TORQUE
WRENCH SET



- CW+/-14%, CCW +/-6%, Range 1-25NM, Length:200MM
- Aluminum Alloy Handle Included
- Bit Socket of H3,4,5,6, 8,10,T25

GT-9522

10PCS -PRESET TORQUE WRENCH SET



- Bits: H3,4,5,6,T25,30 (inside handle))+Handle
- Socket: 4NM/5NM/6NM

FOR BICYCLE TOOLS

- Bits:H3.4.5.6.T25.T30+T Handle
- Socket: 0.6NM/0.9NM/1.2NM/1.4NM/ 2NM/4NM/5NM/6NM



GT-9523

15PCS -PRESET TORQUE
WRENCH SET

- Bits: PH0.PH1.PH2.PH3.PZ1. PZ2.PZ2.PZ3 T7.T8.T10.T15.T20.T25.T27.T30. T35.T40 1.5 / 2 / 2.5/3/4/5/5.5/6/7/8 2.5/3/4/4.5/5/5.5/6/6.5/7/8 Sliding T-Bar
- 1~6NM,ABS Handle

GT-9524

41PCS- TORQUE
WRENCH SET (1~6NM)



E-mail: service@kaupa.com.tw

KAUPA INTERNATIONAL CO.,LTD


TS-9152

ULTRASONIC LEAK DETECTOR



- Quick and simple location of air, water or dust leaks.
- The main application is the tightness test of any kinds, for example, doors, windows, plumbing, container, car windows, refrigerators...etc
- Trace the detector around outside of the screen, windows and door seals to locate the leak.
- Includes adjustable headphones for detector.
- Transmitter and detector powered by 9V batteries.
- Detector/Transmitter
- Operating Temperature: 0~40°C
- Operating Humidity: <80% RH
- Detector-Frequency Responding: 40kHz ± 2kHz
- Generating Frequency: 40kHz
- Power: 9V battery

- Material: Brass
- Applicable to VW-Audi vehicles equipped with a transverse-mounted 7-speed DSG transmission (DQ200 Series).
- Alternative tool: VAS 6262/4
- The adaptor is needed for filling DSG transmissions.

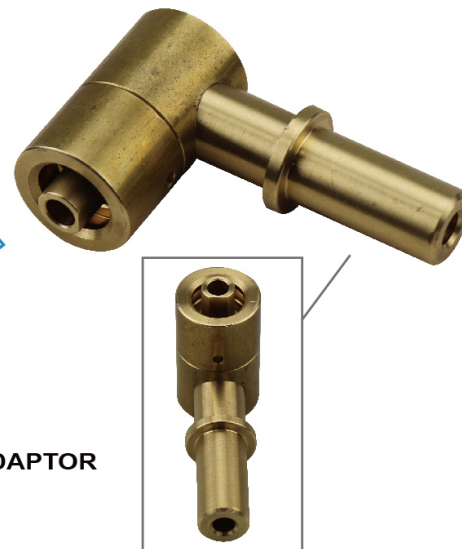

OF-9071

ANGLE OIL FILLING ADAPTOR

- Material: Cr-V
- Size: Torx® T55 with 17mm Hex drive
- Application: BMW Mini
- Saves time when checking /changing or adding auto transmission fluid. Makes it easy to remove or fit the filler plug.
- Tight area makes it difficult for standard tools to be used
- Torx® is the Registered trademark of Acumen Global Technologies



ST-9430

HEX 17MM T55 36L SOCKET FOR BMW MINI

PC-9345

5TH GEAR BOX PULLER FOR FORD

- For removing the 5th gear on Ford B5 & IB5 transmissions (front wheel drive) as listed, including the latest new models fitted with these transmissions.
- Applications Ford: Fiesta with IB5 gearbox – all models to date, plus older models with B5 gearbox; Focus Mk1, Mk2, Mk3 – all models to date, plus older models with MTX75 gearbox; KA – all models; Mondeo; C-Max & Galaxy – all models with 5 speed gearbox; EcoSport & Fusion – all models with 5 speed gearbox; Transit FWD and Transit Connect – all models with 5 speed gearbox.
- Applications Jaguar: X-Type - with 5 speed gearbox.
- Equivalent to OEM 308-082.
- Split collet design, giving a compact and easy to use tool.
- Always grease the force screw and mating components with Molybdenum Disulphide grease.

