


BE-9074

CORDLESS CIRCUIT TESTER

Dual-tones buzzer

- + Continuously
- Intermittently

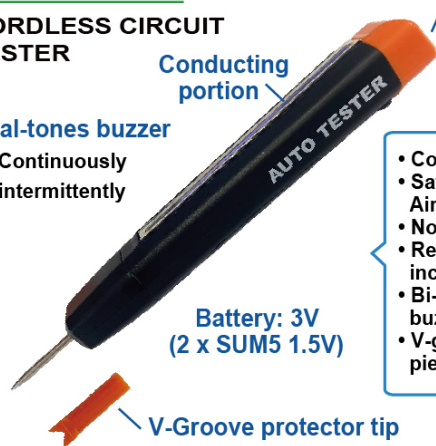

Bi-color LED

- Positive polarity
- Negative polarity

Conducting portion

Battery: 3V
(2 x SUM5 1.5V)

V-Groove protector tip

- Conducting portion
- Safe with ECMs, Sensors, Transducers, Airbags, etc.
- No ground wire or clip required.
- Replaceable long-life alkaline batteries included.
- Bi-color LED Lights and Dual-tones buzzer to distinguish "+/-"
- V-groove needle accessory makes piercing and carrying safe.

BE-9073

CONNECTOR RELEASE TOOL



- Having the right tools for the job at hand makes any task much easier, and less time consuming. This VAG Connector Removal Tool can easily be a best friend to any DIY enthusiast.
- The tool fits directly on the push & pull style VAG connector and gives just the perfect amount of leverage to release the connector and not break the tab. This style connector is often found on mass air flow (MAF) sensor, coil packs, headlights/fog lights, level sensors, MAP sensors, and etc..
- A large ergonomic ball that fits into your palm is also fitted on the end of the tool for extra grip when pulling the connector off. Save your connectors, your thumbs.
- Even connectors where the tab is broken off are no longer an issue and can be release with ease.

BE-9075

FENCE TESTER



- Display: 8 Neon lights indicate 700-1000-2000-3000-4000-5000-6000-8000V Plus voltage.
- Measurement Range: Pulse voltage 500V~9000V
- Pulse Rate: One pulse every 0.5 sec to 2sec
- Operating Temperature: 0~50°C(32~122°F), <75%RH
- Storage Temperature: -20~60°C(-4~140°F), <85%RH

- Portable
- Check the pulse voltage.
- No battery required
- Gardening farm tools.

GT-9532

DIGITAL TREAD DEPTH GAUGE



- Tire tread depth gauge
- Larger LCD display for easy reading.
- Optional Fractional system (1/64" or 1/128").
- Units: Metric/inch
- Range: 0-25.4/1" or 0-35mm/1.3"
- Resolution: 0.01mm/.0005"
- Accuracy: +/-0.1mm/.005"
- Battery: 1xLR44

KAUPA APP



Android



IOS



E-mail: service@kaupa.com.tw

KAUPA INTERNATIONAL CO.,LTD

BR-9065

4-IN-1 BRAKE CALIPER PRESS



• works on twin and quad piston calipers, as well as single and twin piston floating calipers. The centrally located ratchet evenly spreads force in a parallel manner to prevent misalignment of pistons. Ratchet technology gives a full 180-degree swing, so that the spreader may be placed at any position. An extended reversing lever allows for easy change from spreading to retracting



BR-9075

HYDRAULIC FLARING TOOL SIZE:4.75MM.5MM.6MM WITH DEBURRING



BR-9093

UNIERSAL HYDRAULIC BRAKE LINE FLANGING TOOL SET SIZE: 4.75,5,6mm SAE & DIN



BR-9095

BRAKE PIPE FLARING TOOL-3/16", 1/4", 5/16", 3/8"1/2";4.75,5,6,8,10MM



ET-9212

23PCS INJECTOR REMOVAL PULLER AND DISMANTLING SET



- Suitable for the removal of stubborn Bosch/Delphi diesel injectors.
- Set includes 6 adaptors for different removal methods.
- Features a flexible joint adaptor allowing the slide hammer to be used in restricted areas.

Content:

- Connecting thread (injector nozzle):M18*1.5
- Slide hammer:4.8 kg
- Universal joint:M18*1.5
- Pull Spindle-IT-M14*1.5, OT-M16*1.0, OT-M17*1.0, OT-M20*1.0, OT-M25*1.0, OT-M27*1.0, IT-M16*1.5, IT-M25*0.5, IT-M25*0.75, IT-M27*1.0
- Injector gripper: 12MM, 13.5MM, 16MM, 26MM
- Special bit insert hex 10mm:ø7.6*ø4.8 , ø6.6
- Special socket insert 27mm ,25mm,29mm, 30mm hex

BR-9096

ADJUSTABLE BRAKE CALIPER HOLDING TOOL 500MML



- Special design for the repair brake caliper kit.

ET-9359

SEAL REMOVAL AND INSTALATION TOOL

- A comprehensive kit with a range of adaptor sizes to fit most modern vehicles.
- 8 adaptors, sizes (inner x outer): 36 x 46mm, 38 x 48mm, 40 x 50mm, 40 x 52mm, 42 x 54mm, 44 x 56mm, 46 x 58mm, 48 x 60mm.
- 2 spacer adaptors, sizes (L x dia): 35 x 45mm, 65 x 45mm; 2 screw threads: M10 & M12, including washer and nut. Nut secured using 19mm socket or spanner (not included).
- 2 seal removers with different lengths and angles, ideal for removing seals in tight spaces



PC-9007-3

29PCS UNIVERSAL PRESS AND PULL SET

- Materia:S45C(Sleeve)
- Thread: Cr-Mo steel M10-M12-M14-M16 Length;430mmL
- Outer Size: 34-82mm Inner size: 24-72mm Length:70mmL
- Special design for remove the bushing and bearing .
- Universal using



ST-9449

5PCS- 1/2" FLIP LUG NUT SET



- Socket with 13/16" & 3/4" sizes
- Socket with 15/16" & 7/8" sizes
- Socket with 19mm & 17mm sizes
- Socket with 21mm & 22mm sizes
- 1-3" extension bar.



SB-9318

7PCS DR. 1/4" & 3/8" SCREW EXTRACTOR SOCKET SET 3-4-5-6-8-10-12MM



- SIZE: 1/4" X 3 / 4 / 5 / 6 MM
- 3/8" X 8 / 10 / 12 MM

TK-9020

TRACK ROD END SOCKET



- After separating the ball joint from the steering knuckle slip the tool over the track rod and remove.
- Size of opening: 34mm x 18.5mm. Internal diameter 49mm x 57.5mm deep.
- Designed for quick and ease of use.

ET-9360

BMW HIGH PRESSURE PUMP TOOL



- Material: S45C
- A special automotive tool to remove the diesel high pressure pump on BMW.
- This is a standalone tool , and does not require an additional puller
- Engines: N47 / N57
- OEM: BMW 118740 / 118 740