

ARW-9887

3/8" SQ. -90 DEGREE CORNER IMPACT WRENCH- 8,000RPM

- 2 step throttle trigger of patent.
- 90 angle head allows flexibility in tight spots.



Std. Bolt Cap.	Drive Size	Torque @0.5 Sec	Torque @2 Sec	Free Speed	Air Cons	Length	Weight	Noise
mm	inch	Nm	Nm	RPM	cfm(l/min)	mm	kg	dB(A)
6~8	3/8" Sq.	52	57	8000	5.6(160)	217	1.3	86.4

ARW-9888


3/8" REVERSIBLE AIR DRILL- 2,100RPM

Reversible	Chuck Size	Free Speed	Air Cons	Length	Weight	Noise
YES	in(mm)	RPM	cfm(l/min)	mm	kg	dB(A)
	3/8"(9.5)	2100	10(285)	185	1.24	93



ARW-9892

3/4" SQ DR SUPER DUTY COMPOSITE AIR IMPACT WRENCH

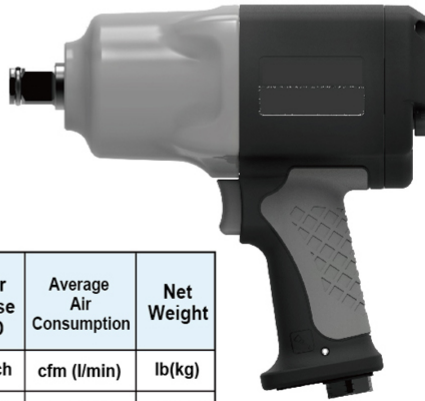

Square Drive	Free Speed	Max. Torque @5 Sec	Overall Length	Air Inlet	Air Hose I.D	Average Air Consumption	Net Weight
inch	RPM	ft-lb(Nm)	inch(mm)	inch	inch	cfm (l/min)	lb(kg)
3/4	6000	1300(1763)	8.7(222)	3/8	1/2	7.3 (207)	9.24(4.19)

ARW-9893

1/2" SQ DR SUPER DUTY COMPOSITE AIR IMPACT WRENCH- 9,500RPM



Square Drive	Free Speed	Max. Torque @5 Sec	Overall Length	Air Inlet	Air Hose I.D	Average Air Consumption	Net Weight
inch	RPM	ft-lb(Nm)	inch(mm)	inch	inch	cfm (l/min)	lb(kg)
1/2	9500	1000(1356)	7.5 (190)	1/4	3/8	7.3 (207)	5.07(2.30)





3PCS-TIRE LEVER SET

GT-9525~9530 SERIES

www.kaupa.com.tw

GT-9525


- 3 Tire levers attached a patch kit to carry on ride easily.
- Tire lever with rounded shape to remove tightest tire smoothly and notched handle to prevent slipping while tire removing
- Content:
 - *3pcs tire lever – made of POM
 - *6pcs self-adhesive patch.
 - *1pcs sandpaper.



- The unique design lifts the tire away from the rim.
- Makes changing tires a snap.
- The new shape and surface of the tire lever makes the assembly and disassembly of a tire more enjoyable.

GT-9530

MADE OF NYLON

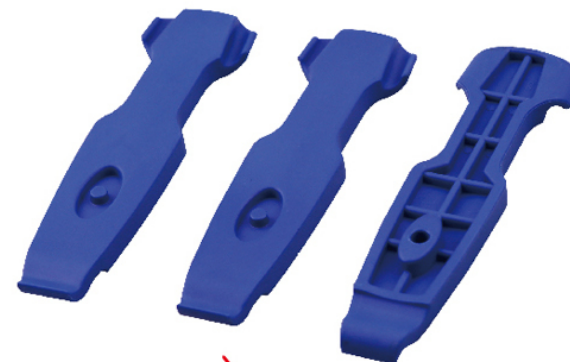

GT-9526

MADE OF PC 100%



GT-9526-1

MADE OF POM



E-mail: service@kaupa.com.tw

KAUPA INTERNATIONAL CO.,LTD



www.kaupa.com.tw



OI-9145

TURBO POWER FOAM GUN

Feature:

- Aluminum body-Light and Durable
- Maximum pressure can reach 15Bar
- Large capacity 1000ml-fast and efficient
- With rich and fluffy foam, which can well cover the dirt to maximum the removal performance

Application:

- The removal of automobile/scooter body dirt and stain
- Professional automobile detailing
- Buildings, wall bricks and wall dirt removed

Specification:

Working Pressure	0.3~1.5Mpa(3~15Bar)
Material	Body: Aluminum alloy Bottle: HDPE (1000 ml)
Port size	1/4G
Air Consumption	8Bar≥300L/M
Temp Range	-5~+60°c (Non frozen)
Shooting Range	2.5M (inlet 5Bar)

OI-9146

BRAKE FLUID EXCHANGE MACHINE



- Machine helps brake fluid exchange efficient and easy
- Transparent front 2-liter tank makes brake fluid visible, LED lights included
- Powered electrically - no air compressor required
- Light weight, easy to carry around



KAUPA APP



Android



IOS



E-mail: service@kaupa.com.tw

KAUPA INTERNATIONAL CO.,LTD



www.kaupa.com.tw



PLC-9068

6" ELECTRONICS
CABLES CUTTER



PLC-9068-1

6" ELECTRONICS CABLES
CUTTER
CR-MO, RED/BK HANDLE



Other option
2C handle type.

PLC-9069

5" COMBINATION PLIERS



PLC-9070

5" COMBINATION PLIERS
Cr-Mo, Polish BK/RED HANDLE



PLC-9071

5" COMBINATION PLIERS-ESD TYPE HANDLE
Cr-Mo, Polish, BK/YELLOW HANDLE



E-mail: service@kaupa.com.tw

KAUPA INTERNATIONAL CO.,LTD



www.kaupa.com.tw

ST-9453

1/2" DR. WHEEL NUT SOCKET

18.5X19.5MM X 63L



- 1/2" drive socket with 18.5 mm and 19.5 mm (20.5 mm and 21.5 mm) hexagon. Designed for use with a short 1/2" extension.
- Sockets for removing damaged wheel nuts
- Total length: 63 mm



ST-9454

1/2" DR. WHEEL NUT SOCKET

20.5X21.5MM X 63L



OI-9149

1.1L ADBLUE FILLING FUNNEL -ANGLED



- AdBlue filling funnel connects to all filling necks.
- Open/close valve to stop filling once the tank is full.
- Transparent funnel with level scale.
- Funnel cover keeps out dirt and debris when not in use.
- Air breathing pipe design allows air out of the tank and prevent splashing and over filling.

- Dimension: OI-9149- 95x 200x 390MM
OI-9150- 95x 110x 400MM
- Weight: OI-9149- 313g / OI-9150- 292g
- Capacity: 1.1L

OI-9150

1.1L ADBLUE FILLING FUNNEL -STRAIGHT



E-mail: service@kaupa.com.tw

KAUPA INTERNATIONAL CO.,LTD