

BS-9200-1

2PCS HOOD SAFETY LIFT-TWO EXTENSION LENGTH:42CM-69CM




APPLICATION



BS-9332

DENT REMOVAL TOOL SET-3PCS

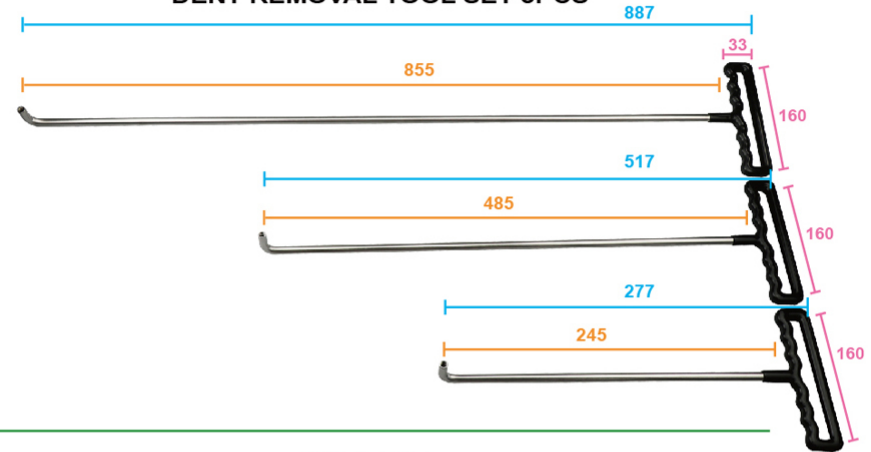

BS-9185


TIGHT OPENING CLAMP



- Able to reach core support and upper sheet metal areas.
- Ideal for small pick-up frame rails.

BS-9186


SMALL MOUTH PULL CLAMP (TWO-WAY)

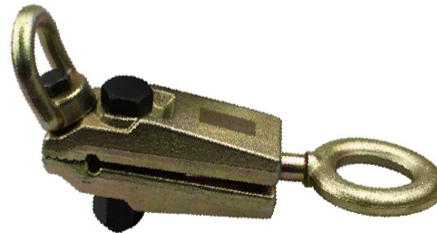

- Drop forged Chrome Molybdenum alloy steel for maximum strength.
- 44mm wide mouth with teeth
- With top pull and 360 degree self tightening pull ring.
- Dual self-tightening serrated jaws for a positive grip.
- Ideal for work in tight areas.

BS-9187

90 DEGREE CORNER CLAMP - MANUAL

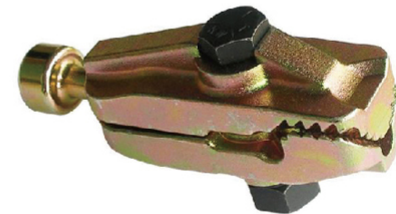

- Eliminates the need to use two separate clamps.
- Will be able to get into narrow, confined areas.
- Cross-hatched teeth are offset to provide a firm grip for straight ahead pulls on right angle corners.
- To be used with slide hammer.



AC-9008

T TYPE CLIP PULLER

- Two position head for easy access.
- Universally suitable for HENN® clamps as found on coolant hoses/charge air hoses.
- Application include: Installed, for example, in the following vehicles: VW-Audi, Seat, Skoda, BMW, Peugeot, Citroën, Dacia, Fiat, Ford, Kia, Lexus, Mazda, Mercedes, Nissan, Opel/Vauxhall, Porsche, Renault, Toyota, Volvo etc.
- Designed for the professional loosening / opening of HENN® Clamps as found on coolant hoses/charge air hoses in passenger cars.
- An indispensable tool when removing / installing coolant hoses/charge air hoses etc.
- T-Handle.



WR-9316

8PCS ADJUSTABLE HOOK WRENCH SET

- Hook type and pin type to be one wrench.
- Ideal for adjusting collars, lock nut rings, and bearings.
- Specifically engineered to hold up under the most rigorous industrial use.
- Pin size: Ø7.9*8L, Ø6*3.8L, Ø6*7.9L, Ø5*4L, Ø4*4L
- Material: Cr-Mo Steel Chrome plated




Product Code	Span Diameter (mm)	Hook Depth (mm)	Hook Thickness (mm)	Overall Length (Inches)
WR-9316-04	35-60	2.8	5	175
WR-9316-90	60-90	3	10	200
WR-9316-120	90-120	4	12	290

BS-9383

MINI GREASE GUN

- Capacity of grease tube : 3 oz. (88.8 c.c.)
- Is able to choose grease hole 0.75mm , 1.0mm , 1.35mm tip.
- One hand operation with spring return plunger.
- Fits most flush type fittings.
- Special tip for composite air tools included .

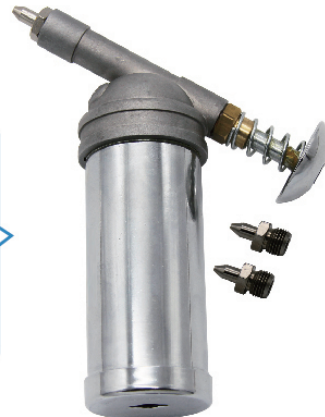

ET-9365

DIESEL PUMP SPROCKET PULLER-VAG

- Applications: Volkswagen Golf (from 2013), Audi A3 (from 2013), Skoda Rapid (from 2012), Octavia (from 2013), Fabia 2014, Superb (from 2015), Kodiaq 2016, and Seat Alhambra (from 2011), Ibiza (2008), Leon (2013) and Ateca.
- Equivalent to OEM T10489. Use in accordance with OEM instructions.
- 15mm hex force screw and 24mm holding hex.
- Use with hand tools only.
- NOTE: Lubricate the force screw with molybdenum disulfide grease.



GT-9563

SAE J1772 CONNECTOR EV CHARGER NOZZLE
HOLSTER DOCK AND J-HOOK COMBINATION



GT-9564

LEVEL 3 EV CHARGER CABLE TYPE 2 TO TYPE 1
SAE J1772 TO IEC 629196 32A 230V FOR ELECTRIC
CAR CHARGER- **USA TYPE**

Product name	EV Charging cable/Mode 3 EV charger
EV connector	Type 2 to Type 1
Rated voltage	230V AC
Current	32A
Power	7.4KW
Cable	5m/customizable
Cable specifications	3*6mm ² + 2*0.5mm ²
Cable shape	Straight (acquiescent) / Coiled
Cable color	Black (acquiescent) / Green / Orange /customizable
Waterproof grade	IP54
Operating Temperature	-30°C ~ +50°C



GT-9565

32A ONE-PHASE TYPE 2 EV CHARGING
CABLE T2 TO T2 IEC 62196-2 MALE PLUG
TO FEMALE PLUG-**EUROPE TYPE**



EV connector	Type 2 to Type 2
Rated voltage	230V AC
Current	32A
Power	7.4KW
Cable	5m/customizable
Cable specifications	3*6mm ² + 2*0.5mm ²
Cable shape	Straight (acquiescent) / Coiled
Cable color	Black (acquiescent) / Green / Orange /customizable
Waterproof grade	IP54
Operating Temperature	-30°C ~ +50°C



PC-9182

MONDEO REAR BUSH TOOL KIT

- Suitable for the removal / installation of the rear trailing arm mounting bushes on Ford vehicles.
- Can be used in situ without removing the arm from the vehicle. Also suitable for some Volvo vehicles that share the same Ford platform.
- Item Content:
 1. Pressure piece short pin
 2. Pressure piece pin bulkhead Tension
 3. Nut short, with ball bearings Train
 4. Pressure screw
 5. Shell
 6. Pressure piece installation / Removal
 7. Pressure Piece
- Suitable for:

Ford Mondeo from '07, Mondeo Turnier '00-'07, S-Max from '06, Galaxy from '06, Volvo XC 70 from '07, V70 from '07, XC 60 from '08, S60 from '10, S80 from '80, V60 from '10



TS-9121

12PCS LOCKING NUT SET FOR DIESEL COMPONENTS

- For sealing Injectors prior to pressure loss Testing.
- Protects the Injector from contamination during Work.
- Suitable For use on: Bosch, Delphi, Siemens & Denso Injectors.
- Applications:

Opel-Vauxhall, Mazda, Ford-Volvo, PSA Group, Mercedes-Benz, Renault, Fiat-Chrysler & Others.
- Contents: 6x M12x1.50 Caps, 6x M14x1.50 Caps.



TT-9032

ENGINE TIMING TOOL SET FOR VGA-2.4D

- For engine codes AAB, AJA, BJJ, BJK, BJL, BJM
- For VW Transporter 2.4D (95-03), Crafter 2.5TDI (06-09) and LT models
- To be used as OEM T10025, 2065A, 206



TT-0016

PETROL 2.2, 16V(CHAIN ENGINE)-TIMING & WATER PUMP TOOL SET

- Water Pump Tool Set for Opel / Vauxhall 2.2 16V.
- Retains position of coolant pump sprocket during replacement of the pump and maintaining engine timing.
- OEM: KM-J-43651, KM-6148, KM-6077



TT-9287

ENGINE TIMING TOOL SET FORD 2.0 ECOBOOST

- For adjusting the engine timing on chain driven 2.0L petrol direct injection engines with variable valve timing
- Installed in the Galaxy / Mondeo / S-MAX / Focus models
- Engine codes TNWA / TNBA / TPWA / MGDA / XQDA
- Crankshaft locking tool, to be used as OEM 303-748
- Camshaft alignment plate (up to 05.2011), to be used as OEM 303-1504
- Camshaft alignment plate (after 05.2011), to be used as OEM 303-1566
- Alignment tool for crankshaft position sensor, to be used as OEM 303-1521
- 2.5 mm tensioner locking pin



TT-9288

SETTING / LOCKING TOOL KIT RENAULT / NISSAN & VAUXHALL / OPEL 1.6/2.0/2.3 DCI

- Introduction:
Suitable for setting and locking 1.6 & 2.0 & 2.3 DCi/CDTi chain drive engines fit in Renault, Nissan and Vauxhall / Opel models with M9R/M9T engine code.
- OEM NO.:
KM 6130, MOT1770, KM 956-1, EN-48334, MOT1769, MOT 1969, EN48332, MOT1773, MOT1766, EN48330, 09953-05010, MOT 1970, MOT 1969



ET-9364

FUEL PUMP SPROCKET HOLDING TOOL

- Material: S45C Steel
- **Features and Benefits:**
- The fuel pump on the 1.6 CDTi engines from Vauxhall is mounted on the rear of the engine and when removal is required for service or repair the pump sprocket must be held in place or the drive chain will drop into the engine requiring an engine rebuild.
- This tool has been specifically designed to allow the pump sprocket to be held and the pump pushed out with the minimum of fuss and work.
- Applications: Vauxhall Astra (2013 - 2018), GTC (2015 - 2018), Insignia (2015 - 2018), Meriva (2013 - 2017), Mokka (2014 - 2018), Zafira (2013 - 2018).
- Engine Applications: 1.6 CDTi diesel, LVK/B16DTR, LVL/B16DTH, LWQ/B16DTC, LWQ/B16DTE, LWV/B16DTU.
- Equivalent to OEM EN-50885.
- Includes slide hammer to extract the sprocket blanking plate. New sprocket blanking plate will be required - OEM part number 5557422.



ET-9367

6PCS 3/8" DR. SENSOR SOCKET SETS-13-14-17MM

- Material: Cr-Mo Steel Driver: 3/8" Dr.
- **Feature:**
- This set of sockets is designed to remove most EGT sensors used on cars, light, medium, and heavy-duty trucks.
- Designed to drive all 6 sides of the hex equally to reduce the chance of damage.
- The 3 different sizes, 13mm, 14mm, and 17mm

